

[22750/405A]

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Inventors : Hans-Michael KÜHL et al.
Serial No. : 09/835,261
Filed : April 12, 2001
For : ELASTOMER FLOOR COVERING AND METHOD FOR ITS
MANUFACTURE

Examiner : Tamara Dicus

Art Unit : 1774

Confirmation No. : 5004

I hereby certify that this correspondence is being deposited with the
United States Postal Service with sufficient postage as first class mail
in an envelope addressed to:
Mail Stop RCE
Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450
on

Commissioner for Patents
P.O. Box 1450
Alexandria, Virginia 22313-1450

Date: 3/24/05

Signature: R. Hanson

DECLARATION UNDER 37 C.F.R. § 1.131

S I R:

Firma Carl Freudenberg, assignee of the above-identified application by virtue of
an assignment executed on June 16, 1999 and recorded in the U.S. Patent Office on June 28,
1999 at reel and frame no. 010076/0408, declares and states as follows:

1. Hans-Michael KÜHL, Gerhard GRAAB and Klaus HECKEL ("the inventors")
are the named inventors of the above-captioned application.

2. The inventors conceived of the subject matter described and claimed in the
above-captioned application prior to March 12, 1998.

3. Attached hereto as Exhibit 1 is a Development Formulation, dated
December 18, 1997, including formulations F and G, used to make a floor covering of the
present invention prior to March 12, 1998. Attached as Exhibit 2 is a Testing Results document
dated December 17, 1997 including testing results for formulations F and G.

(a) As can be seen in the Development Formulation document, the floor covering formulations F and G contain between 3 and 20 percent, specifically, 6.6 percent (20,000/303,700), by weight with respect to the floor covering's total weight, of a copolymer of ethylene including at least vinyl esters of saturated carboxylic acids having up to 4 C-atoms in the acid group.

(b) As further can be seen in the Development Formulation document in Exhibit 1, the floor covering formulations F and G contain an ethylene content of the copolymer between 40 and 95% by weight and a comonomer content of between 5 and 60% by weight. Specifically, (i) formulation F uses Evathane®, which is an EVA having a 28% vinyl acetate concentration, an ethylene portion of 72% in the copolymer and a comonomer content of 72% by weight, and (ii) formulation G uses Levapren® 500 HV, which has a vinyl acetate concentration of 50%, an ethylene portion of 50% and a comonomer content of 50% by weight. The melt flow indices of both copolymers Evathane® of formulation F and Levapren® of formulation G are between 0.1 and 50. Data sheets for Evathane® and Levapren® are included in Exhibits 3 and 4.

4. Attached hereto as Exhibits 5 and 6 are top and side photographs of two sample pieces of floor covering, labeled Version I and II, respectively, made by the inventors using the teachings of the present invention prior to March 12, 1998. The samples are cut from floor coverings having a width of between 1 m to 2 m. The floor coverings each have a thickness between 1.5 and 3.5 mm, more specifically, approximately 2 mm, and do not vary in thickness along their respective widths more than 5%. The floor coverings are homogenous and, as can be seen in the photograph, have a multicolored directionless pattern.

5. The inventors exercised diligence in constructively reducing to practice the subject matter described and claimed in the above-captioned application from at least a time prior to March 12, 1998 continuously up to June 28, 1999 the filing date of application serial no. 09/344,975 in the United States Patent and Trademark Office. The present application is a divisional application of application no. 09/344,975, which issued as U.S. Patent No. 6,251,321. During that time, the inventors provided information to patent counsel for preparation of the above-captioned application and reviewed and revised drafts of the above-captioned application.

Drafts of the German priority patent application were received by at least one of the inventors from patent counsel on July 8, 1998. Further, drafts of the above-captioned U.S. patent application were provided by patent counsel to at least one of the inventors by at least correspondence dated June 4, 1999.

6. Firma Carl Freudenberg hereby declares that all statements made herein of its own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 35 U.S.C. § 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Date: 18 March, 2005

Joachim Horn ppr. Gün
Name: Joachim Horn
Title: — Procurists —
On Behalf of Firma Carl Freudenberg

EXHIBIT 1

Kühl / FB-E

SAP-Nr. 700 000 19

Waage	Knetter	Walze	Presse	Datum	Bearbeiter	Anschluß	
				18.12.97	KI		F / G / H

Betreff: Streubelag

DEVELOPMENT FORMULATION

Entwicklungs-Rezept	F	G	H		Vulk.°C Min
					170 - 5
Evathane 28.05	-	20,000	-		
Levapren 500 HV	20,000	-	-		
Ker 1904	17,500	17,500	20,000		
Ker 1502	37,100	37,100	59,600		
SMR 5 CV	25,000	25,000	-		
VN 3	15,000				
Sillitin N 87	160,000	160,000	60,000		
Argirec B 24	-	-	60,000		
Martinal OL-104	-	-	20,000		
Zinkoxid spezial SPECIAL	5,000				
Benzoessäure	2,500				
Ralox LC	0,800				
Microzellmehl POWDER	6,000	6,000	-		
Bayertitan RU 5	11,400				
Eisenoxid Rot 130 B RED	0,700				
Eisenoxid Gelb 920 YELLOW	0,300				
Oppasinblau 6900	0,700				
Schwefel 80/90 5% SULPHUR	3,600				
Stearinsäure ACID	1,400				
Norsolene S 115	2,000				
Paraffin	0,700				
Hoechstwachs PA 520	0,600				
Aktioplast PP	-	-	2,000		
Polyglykol 6000	5,000				
CZ-Batch	7,000				
Mixland ZBEC E 70	1,400				
	303,700				

doppelter Ansatz DOUBLE BATCH (OR FORMULATION)

bitte benachrichtigen PLEASE NOTIFY

zu Plus-Korn mahlen GRIND TO PLUS-KORN

ZINC OXIDE

BENZOIC ACID

MICROCELLULAR

IRON OXIDE

IRON OXIDE

STEARIC

PARAFFIN

HOECHST WAX

POLYGLYCOL

VULCANIZATION BEHAVIOR

STORAGE AT

Vulkanisationsverhalten	Technolog. Daten
ML1 + 4 bei AT 100 °C	Resteindruck REMAINING
t5 bei AT 140 °C	Xenotest 350 MWs/m²
Elastograph bei AT °C	Abrieb 5 N
speichern unter: streu1 / F-H	Sauerstoffindex (FB-E)

TECHNOLOGICAL DATA

IMPRESSION TEST

XENO TEST

ABRASION

OXYGEN INDEX

EXHIBIT 2

Streubelag SKID - PROOF GROUND [OR FLOOR] LINING [LITERALLY: SCATTERED-ON COVERING]

Versuche in der Laborpresse (Hr. Platzner) EXPERIMENTS USING LAB PRESS
Ermittlung der Reißwerte ASCERTAINING TEARING STRENGTH

SPECIFIC PRESS PRESSURE

STRENGTH

ELONGATION

MIXTURE

Mischung	spezif. Pressen- druck (bar)	Zugfestigkeit (longs MPa quer MPa)		Reißdehnung (longs MPa quer MPa)	
	BAR	LONGITUDINAL MPa	TRANSVERSE		

A 913	20	4,9	4,9	32	32
	30	5,0	5,0	29	32
	200	6,0	5,6	127	129

B 914 NR	20	4,9	4,9	27	26
	30	5,0	5,1	25	25
	200	5,9	5,4	131	137

C Argirec	20	5,5	5,5	28	28
	30	5,5	5,7	26	28
	200	9,4	8,3	271	282

D Styrol	20	6,4	5,7	20	19
	30	5,6	5,7	20	20
	200	9,6	8,6	86	80

E mega Bet	200	4,4	4,3	23	26
---------------	-----	-----	-----	----	----

AS 100 (50)

Härte

101 95	F Levapren	20	4,0	3,8	147	150
		30	4,0	4,1	174	162
		200	5,4	4,8	262	236

89
90

102 107 113	G Evathane	20	4,2	4,1	90	68
		30	4,3	4,5	101	115
		200	4,9	5,5	200	224

93
93
94

114 104 118	H Argirec Markinal	20	4,8	4,8	42	54
		30	4,9	5,0	58	56
		200	6,2	6,5	254	232

95
96
96

EXHIBIT 3

EVATANE® COPOLYMÈRES EVA HAUTE TENEUR HIGH CONTENT EVA COPOLYMERS HOCHPROZENTIGE EVA COPOLYMERE

Grades Grades Typen	Caracteristiques specifiees Specified properties (*) Spezifizierte Eigenschaften			
	Teneur AV VA content	Indice de fluidite Melt index	Point de fusion Melting point	Point Vicat Vicat Point
	VA Gehalt (%)	Schmelzindex (g/10 mm)	Schmelzpunkt (°C)	Vicat Punkt (°C)
18-150	17 - 19	135 - 175	79	43
18-500	17 - 19	450 - 550	74	< 40
24-03	23 - 25	2.5 - 3.5	79	45
28-03	26 - 28	3 - 4.5	75	44
28-05	27 - 29	5 - 8	73	43
28-25	27 - 29	22 - 29	72	41
28-40	27 - 29	35 - 45	72	40
28-150	27 - 29	135 - 175	67	< 40
28-420	27 - 29	370 - 470	67	< 40
28-800	27 - 29	700 - 900	64	< 40
33-25	32 - 34	22 - 29	60	< 40
33-45	32 - 34	38 - 48	60	< 40
33-400	32 - 34	350 - 450	59	< 40
40-55	38 - 41	48 - 62	50	< 40
Méthode de mesure Test method Testmethode	ATOCHEM (IRTF) ATOCHEM (FTIR) ATOCHEM (FTIR)	NFT 51-016 ASTM D 1238 DIN 53735	A.T.D. D.S.C. D.S.C.	NFT 51-021 ASTM D 152 DIN 53460
ISO STANDARD		1133		306

(*) Caractéristiques contrôlées faisant partie intégrante de nos plans de contrôle qualité usine.

Caractéristiques moyennes - *Typical properties* - Typische Eigenschaften

Temperature bille - anneau <i>Ring and ball temperature</i> Ring- und Kugelwert (°C)	Résistance à la rupture <i>Tensile strength at break</i> Zugfestigkeit (MPa)	Allongement à la rupture <i>Elongation at break</i> Reissdehnung (%)	Dureté <i>Hardness</i> Härte Shore A	Masse volumique <i>Density</i> Dichte (g/cm³)
95	5	500 - 800	84	0,93
88	4	500 - 800	80	0,93
165	29	700 - 800	85	0,94
160	33	700 - 1000	83	0,95
140	33	700 - 1000	82	0,95
120	13	700 - 1000	76	0,95
110	11	700 - 1000	76	0,95
90	6	700 - 1000	70	0,95
82	2,5	700 - 1000	62	0,95
78	1,5	300	57	0,95
115	12	800 - 1000	66	0,96
107	10,5	800 - 1000	64	0,96
80	2,5	800 - 1000	45	0,96
100	5	1000	46	0,96
NFT 66-008 <i>ASTM E 28</i>	NFT 51-034 <i>ASTM D 638</i> DIN 53455		NFT 51-109 <i>ASTM D 2240</i> DIN 53505	NFT 51-063 <i>ASTM D 1505</i> DIN 53479
	R 527		868	R 1183

(*) Properties routinely measured during the standard quality control procedure.

Applications principales - Main applications - Hauptanwendungsgebiete

Adhésifs Hot Melts Heißmelzkleber	(Co) Extrusion	Mousses Foams Schäume	Compounds			Additifs-Additives	
			Câbles Cables Kabel	Insonorisation Sound dampening Geräuschdämpfung	Autres Others Andere	Bitumes Bitumen Bitumen	Pétrole Crude oil Rohöl
• •						•	
•	•	•	•		•		
• • • • • • •	• •	•	• • • • •	• •	• • • •		• •
• • •			•		• •	• •	
•			•		•		

Tous les grades EVATANE® contiennent de l'antioxydant.

All the EVATANE® grades contain antioxidant.

Alle EVATANE® Typen enthalten Antioxydant.

(*) Diese Eigenschaften sind der Durchführung des Qualitäts-Kontrollplans unserer Werke verpflichtet.

EXHIBIT 4

Levapren[®] 500 HV

Product Description

Ethylene-vinyl acetate copolymer (EVM) with 50 wt % vinyl acetate

Raw Polymer Properties

Property	Nominal Value	Unit	Test Method
Mooney Viscosity ML (1+4) 100°C	27 ± 4	MU	ISO 289
Volatile matter	max. 0.6	wt %	ISO 248
Vinyl acetate content	50 ± 1.5	wt %	LP testing instruction No.015

Other Product Features

Property	Typical Value
Specific gravity	approx. 1.00 g/cm ³
Total Ash	max. 0.8 wt % ISO 247
Solubility	Soluble in chlorinated and aromatic hydrocarbons

Levapren[®] 500 HV

Packaging

The material is packaged in polyethylene bags and delivered on a pallet containing 40 bags (net weight per pallet 1000 kg). If requested, the material can be delivered in Big Bags (500 kg).

Shelf-life

24 month from date of production at temperatures not exceeding 25 °C in dry conditions; exposure to light has to be avoided.

At higher temperatures or pressures the granules tend to agglomerate. For this reason the flowability of this product cannot be guaranteed.

Product Safety

Relevant safety data and references as well as the possibly necessary warning labels are to be found in the safety data sheet no. 077651.

These raw material properties are typical and, unless specifically indicated otherwise, are not to be considered as delivery specification.

Levapren is a Registered Trademark of Bayer AG

Issue number: LXS 01 / Date of issue: December 02, 2004 / Previous issue from 02-03-2001

This information and our technical advice - whether verbal, in writing or by way of trials - are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. Our advice does not release you from the obligation to check its validity and to test our products as to their suitability for the intended processes and uses. The application, use and processing of our products and the products manufactured by you on the basis of our technical advice are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with the current version of our General Conditions of Sale and Delivery.


EXHIBIT 5

Version I



EXHIBIT 6

Version II

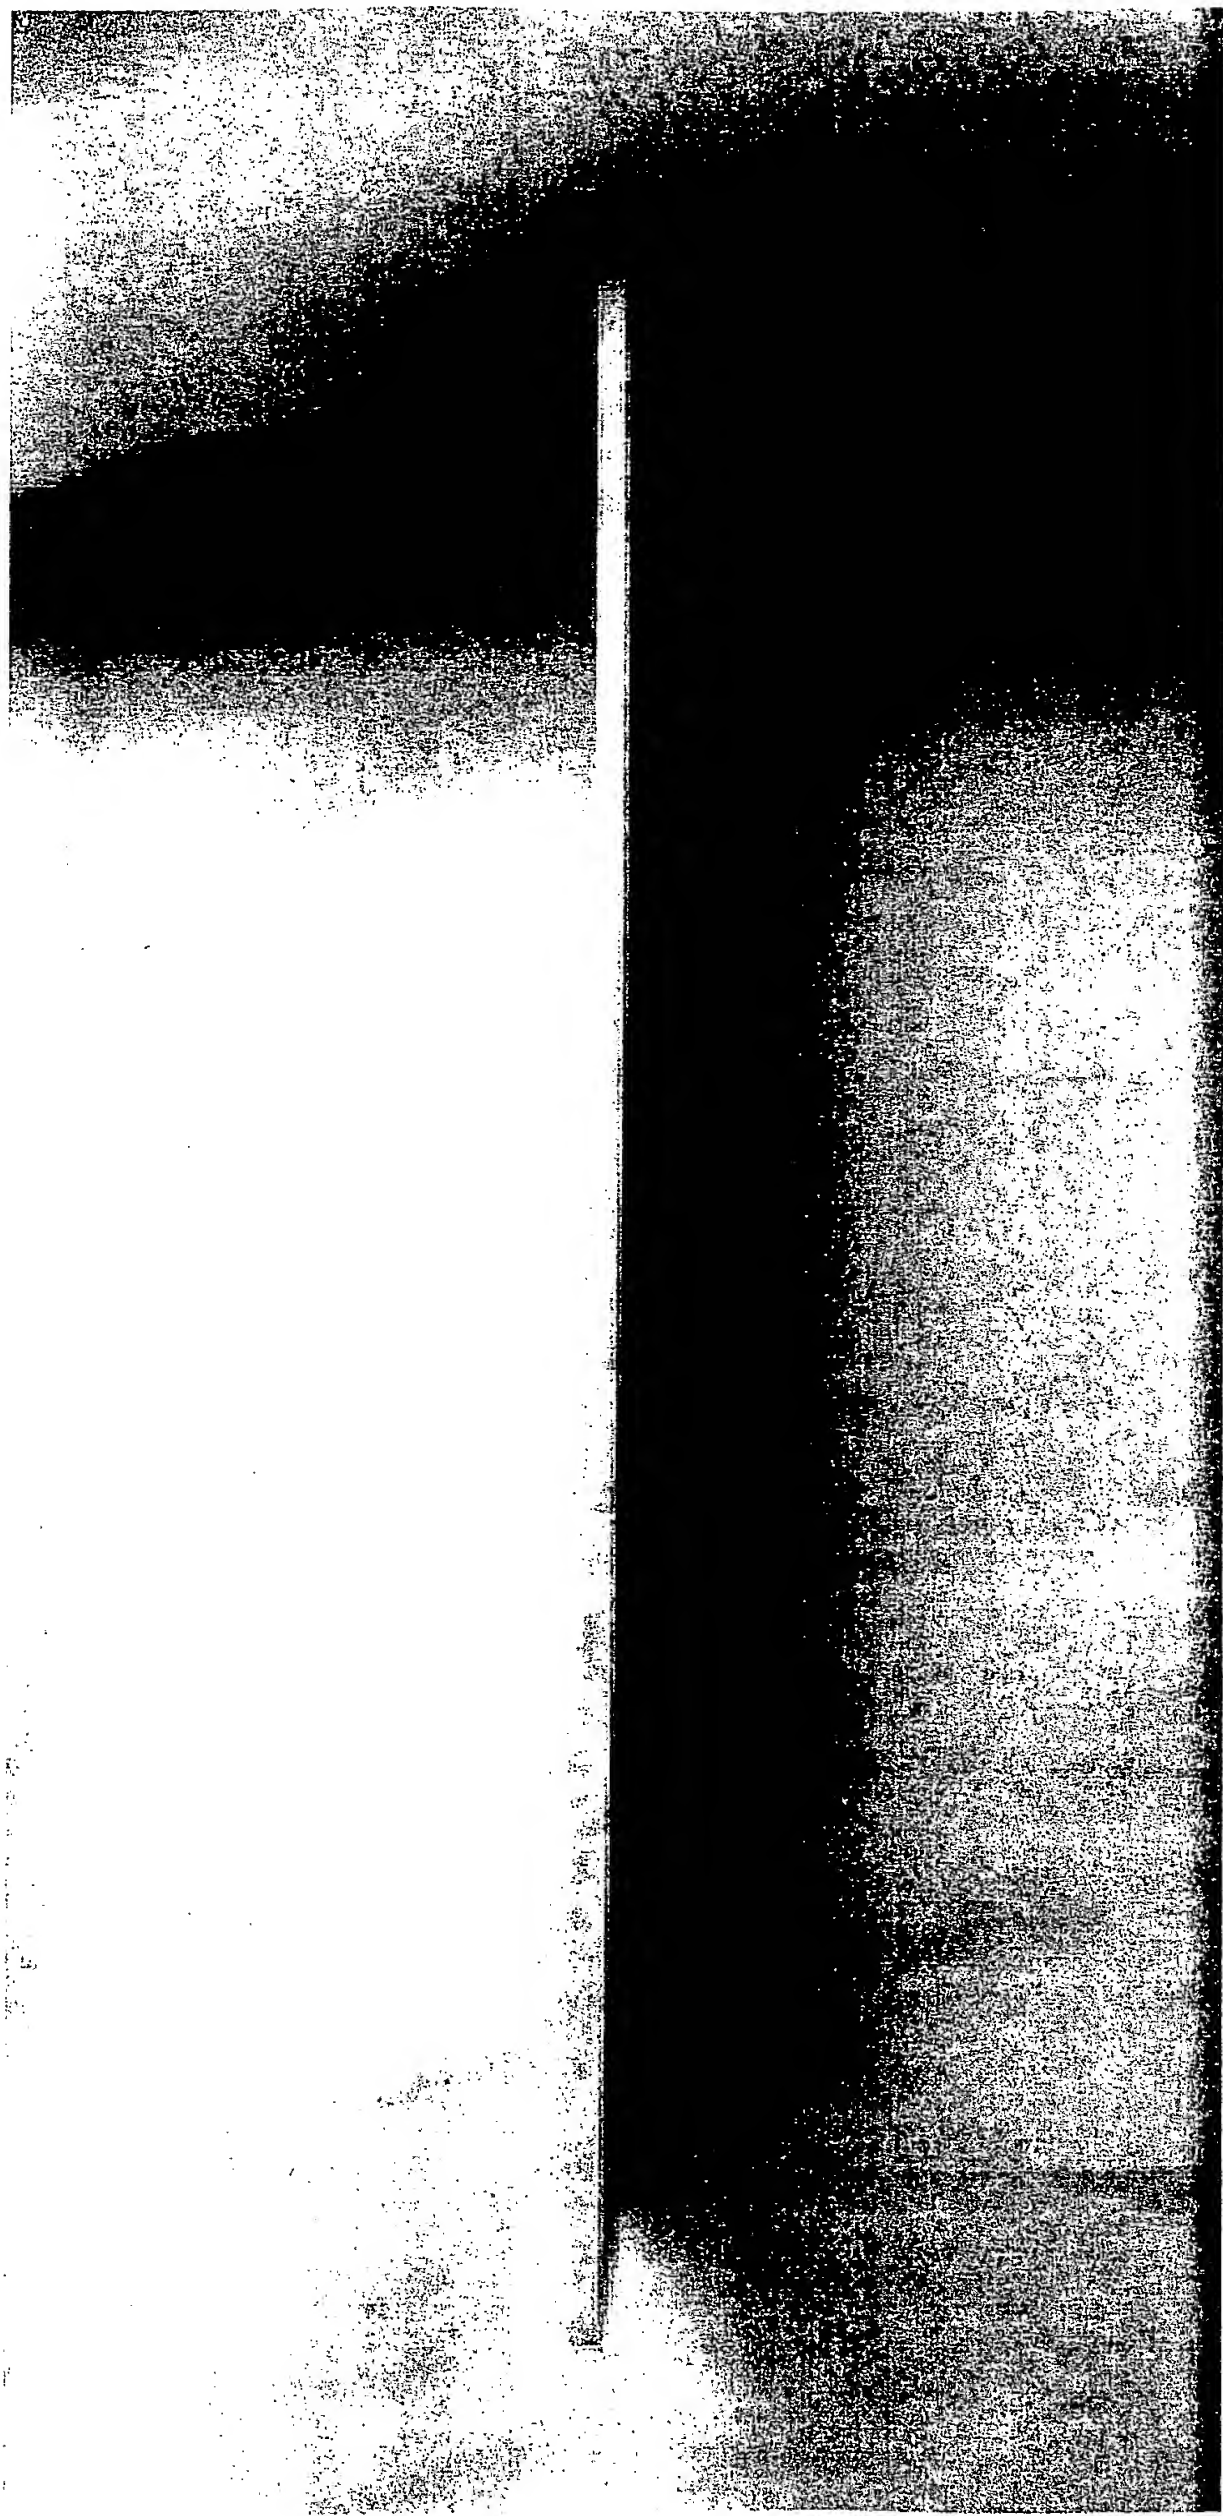

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.